GREVILLEA FIRE CONTROL TOWER

MANJIMUP SCIENCE LIBRARY
HELD (MAP)
924671
Grevillea fire control towers [cartographic material] : Manjimup division
DEPARTMENT OF ENVIRONMENT AND CONSERVATION

34

GREVILLEA FIRE CONTROL TOWER

MANJIMUP DIVISION

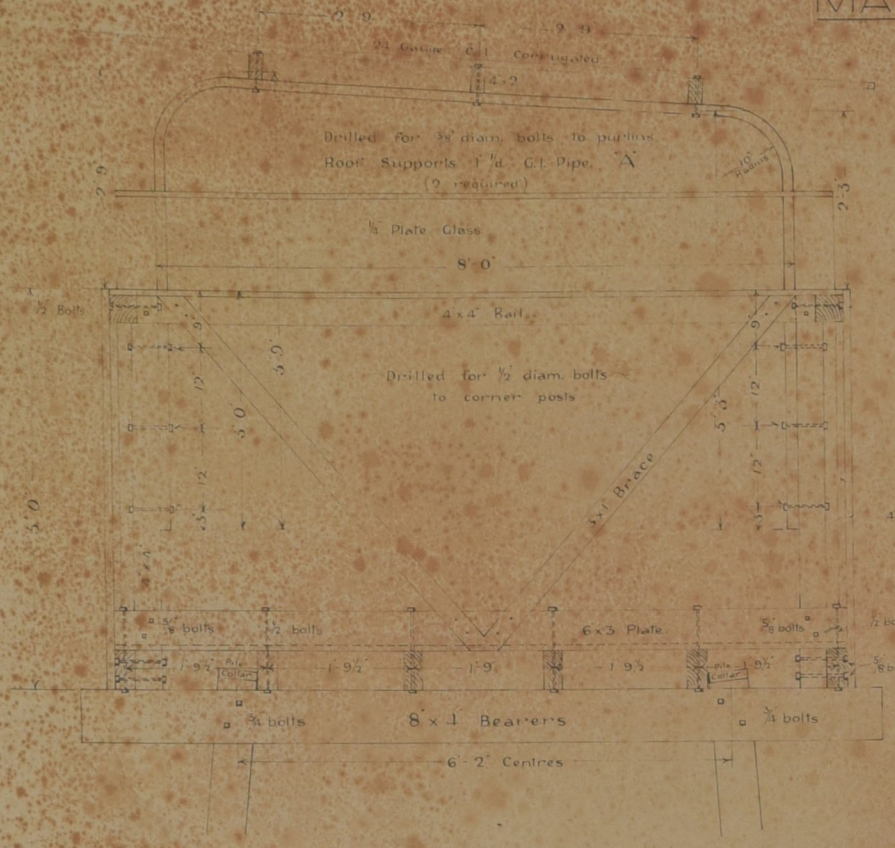

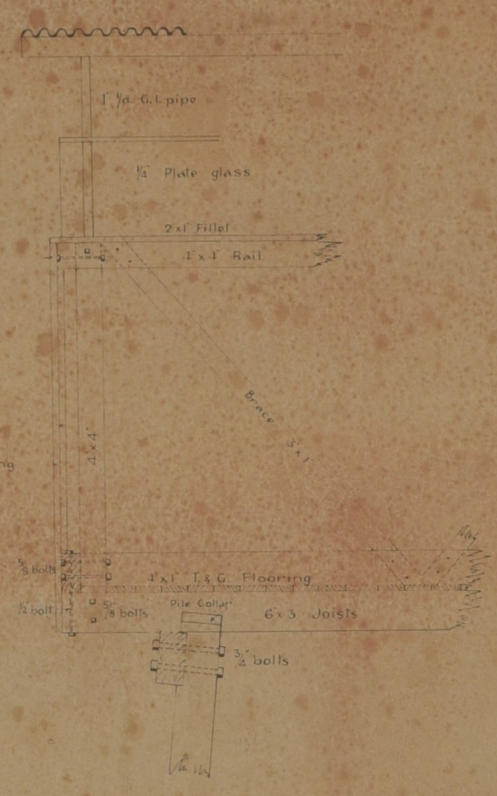

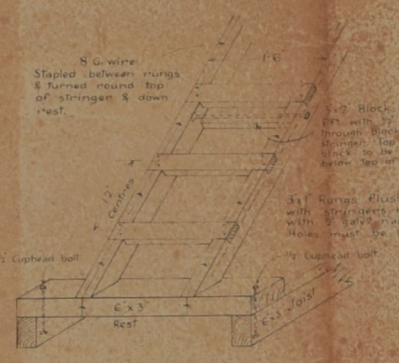

DETAIL OF LADDER
— Scale: 1" - 1 foot —

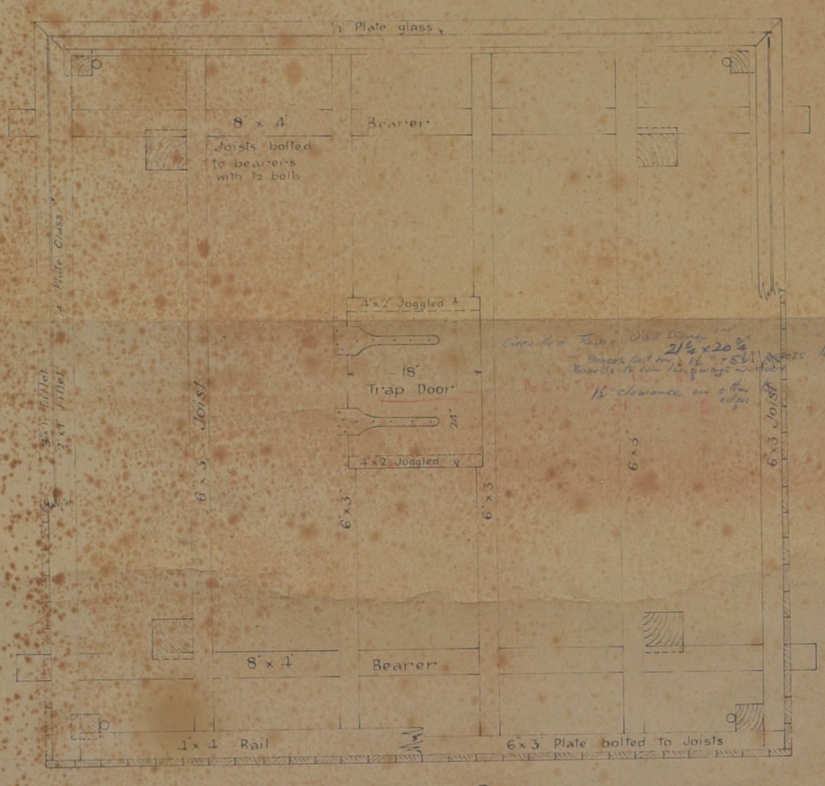

DETAILS OF CABIN
— Scale: 1" - 1 foot —

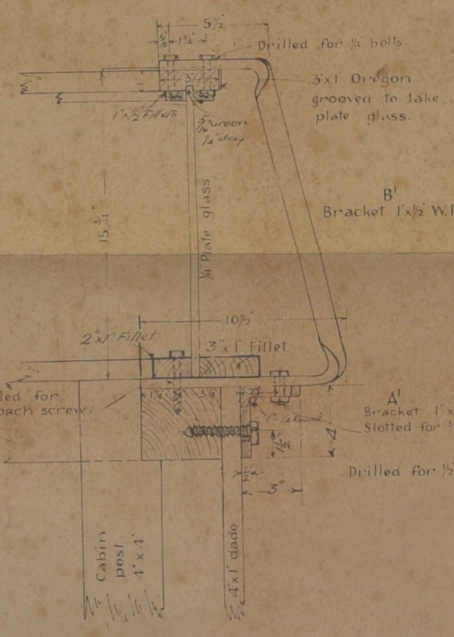

DETAIL OF BRACKETS
TO HOLD PLATE GLASS
— Scale: 1" - 4 inches —

2	Sheets British polished plate glass	9'-0" x 15"
2	Sheets do	do 8'-11" x 15"
1	Brackets	1" x ½ W.I. 6½ x 3" drilled & slotted. Marked A'
1	"	1" x ½ W.I. Drilled & Twisted " B'
4	Bolts	2" x ⅜ diam.
8	"	2" x ¼
8	Coach screws	3" x ½
1	Brackets	2" x ⅛ W.I. 6"x1" drilled Marked C'
12	Bolts	1" x ¼ diam.
1	Packet screws	2" x 8 gauge & 1 pkt 1" x 10 gauge
1/10'	Oregon	3" x 1 grooved.
4/10'	"	2" x 1"
8/9"	"	1" x ½"
4/10		3" x 1
4/10'	Jarrah	1" - ¼ round

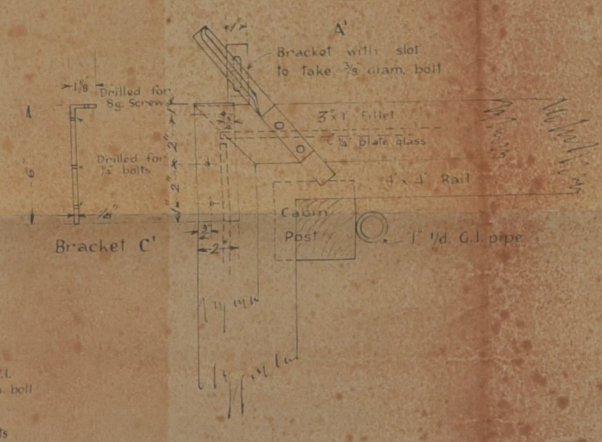



RAIL BRACKET 'D'
⅛" W.I. 48 required
Scale: Full size

All walings & braces to be checked in 1 inch

JUNCTION OF DRAGON TIES 'C'
¼" W.I. plates. 56 required
Scale: 1" - 1 foot

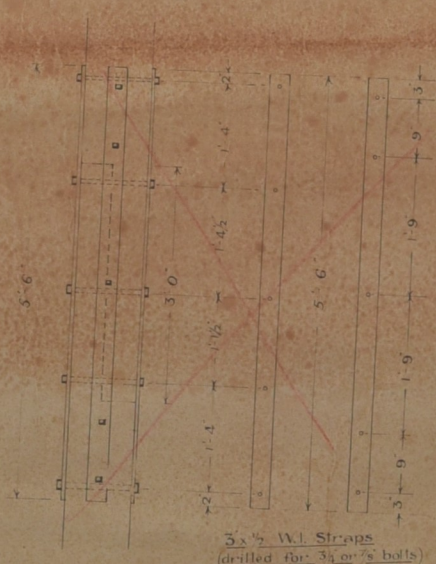

DETAILS OF POSTS & RAILS AT LANDINGS
— Scale: 1" - 1 foot —

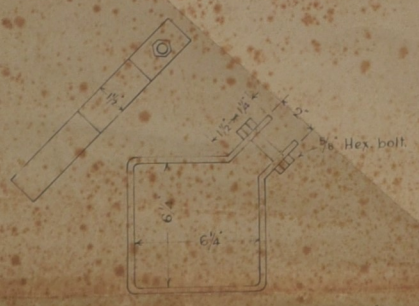

CROWN PILE COLLAR 'E'
½" x ¼" W.I. 4 Required
— Scale: 1" - 4 inches —



BUTT PILE COLLAR 'F'
3" x 2" W.I. 4 Required.
16" x 16" x ¼ W.I. plate - Base of pile. 4 Required
Scale: 1" - 1 foot

Top splice 8" square
Middle " 10" "
Bottom " 10½ "

DETAILS OF SPLICES 'B'
Splice Straps 3"x½" W.I. drilled ¾" 2 sets (16 pairs) required.
" " 5"x¼" W.I. " 1" " (8 pairs)
Scale: 1" - 1 foot

F.D. PLAN No. 743
Sheet No 2

Designed & Drawn by [illegible] 28.8.33
Traced by [illegible] 28.8.33
Examined by [illegible] 27.9.33

924671